

# Technical Data Sheet


## 60cm Slide-out Rangehood

604.8A43.024.001 SL63R



INALT<sup>o</sup>

### DIMENSIONS & TECHNICAL DRAWINGS

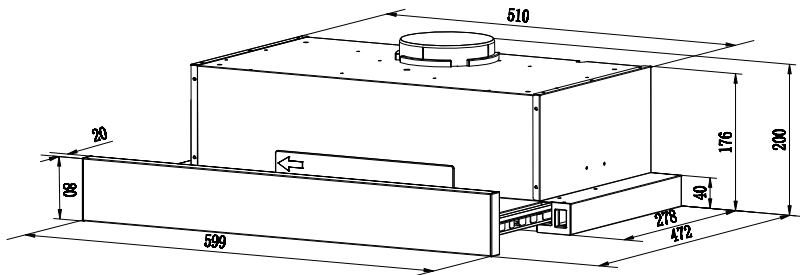

### FEATURES

- 3 speed settings
- 2 ECO halogen lights
- 2 aluminium grease filters
- Slide controls

## Details & Ordering Information

### PERFORMANCE FEATURES

440 m<sup>3</sup>/hr extraction  
Motor type: centrifugal  
Decibel rating (dBA) max: 67-69 dBA

### CLEANING

Dishwasher safe aluminium grease filters

### ACCESSORIES

120mm Flue outlet adapter  
2 Fascia rails included:  
> 40mm for ducted installation  
> 80mm for recirculating installation

### OPTIONAL ACCESSORIES

Carbon filter

### PRODUCT DIMENSIONS

Packaged (W D H mm): 635 x 235 x 358mm  
Physical (W D H mm): 599 x 278-472 x 176mm  
Weight: 10kg

### REQUIREMENTS

Rated voltage: 220-240V, 50/60 Hz  
Supplied with 10 amp plug

### WARRANTY

24 months